


ACCESSORIES

CONNECT 245 PU for 356

Black Tri-Clamp coupling for AIRDUC 356 and adapters to DIN 32676

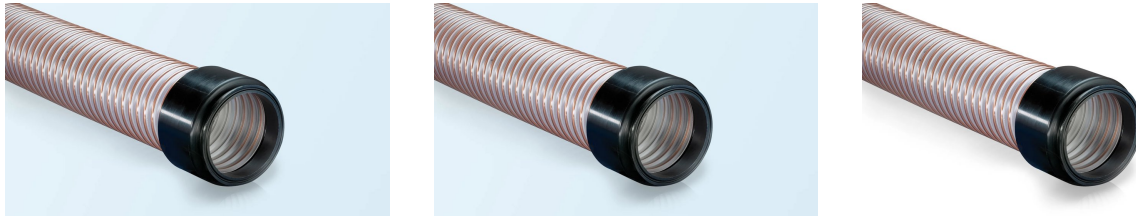

CONNECT 245 PU for 356 is a black Tri-Clamp coupling for the heavy AIRDUC 356 series. It fits adapters to DIN 32676, can be used from -40 to $+90$ °C and is available for hoses with inner Ø from 50 to 200 mm.

Temp: -40°C to $+90^{\circ}\text{C}$

Technical specifications

Colour	Black
Wall construction	Tri-Clamp coupling
Temperature range	-40°C – +90°C
Cut to length	No
Manufacturer SKU	2458501

Standards and compliance

din-32676, REACH, RoHS

Dimensions and ordering

The product is supplied in 7 standard sizes. Each size has its own article number.

Inner Ø [mm]	Outer Ø [mm]	Total length [mm]	Weight [kg/pc.]	Article no.
50	64	67	0.12	24500508501
65	91	67	0.18	24500658501
80	106	72	0.2	24500808501
100	119	77	0.33	24501008501
125	155	91	0.49	24501258501
150	183	102	0.68	24501508501
200	233.5	112.5	0.97	24502008501

The table shows the product's standard dimensions. Weight column is per piece.

Other Particulair microsites

We build specialised microsites for critical industries. Each site provides in-depth product data, documentation and expert guidance for the domain it covers.

particulair.eu/ex-vac	ATEX and ACD vacuum cleaners for explosion hazard zones
particulair.eu/vace	Nozzles and accessories for critical environments
particulair.eu/life-science	Vacuums for pharma and cleanroom
particulair.eu/hardo	Explosion-protected electrical Ex-equipment

Contact and advisory

Particulair

Højtoften 12
2690 Karlslunde, Denmark
CVR: 34129894

Phone: (+45) 70 23 12 03
E-mail: sales@particulair.com
Web: particulair.eu

Product page: particulair.eu/flexcore/en/accessories/connect-245-pu-356/

SMARTER THINKING • BETTER WORKING

This datasheet is generated automatically from Particulair product data. All specifications are taken from the manufacturer's factsheet and are subject to change without notice. Prices and availability provided on request.