


ACCESSORIES

Swaging ferrule for dairy couplings

Stainless steel swaging ferrule for dairy couplings with safety collar and serrated hose shank

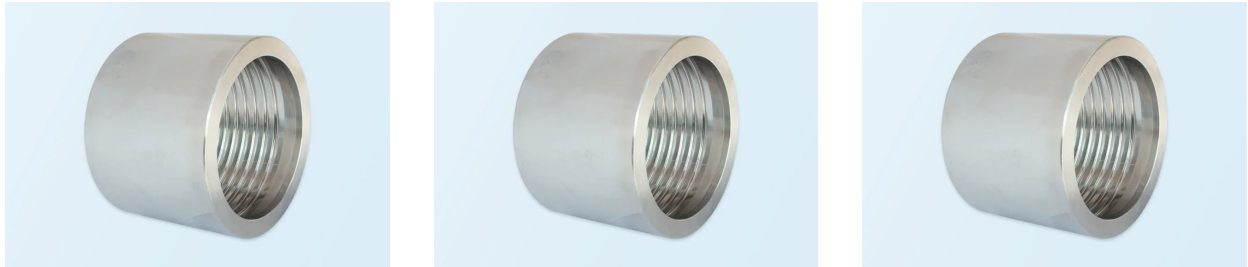

Swaging ferrule for dairy couplings with safety collar and serrated hose shank, such as the MMS and VMS parts with hose tail. The ferrule is placed on the outside of the hose over the tail and swaged, so the hose is held firmly. It is made of stainless steel 1.4301 and is available from DN 25 to DN 75.

Technical specifications

Material	Stainless steel 1.4301
Wall construction	Swaging ferrule
Cut to length	No
Manufacturer SKU	5551

Dimensions and ordering

The product is supplied in 6 standard sizes. Each size has its own article number.

Nom. width [mm]	Inner Ø [mm]	Outer Ø [mm]	Total length [mm]	Weight [kg/pc.]	Article no.
25	39	44.5	44.5	0.116	5551025000
32	47	54	45	0.176	5551032000
38	52.5	60.3	45	0.23	5551038000
50	67	74.5	54	0.318	5551050000
65	83.5	89.5	66.5	0.38	5551063000
75	94.5	102.5	70.5	0.671	5551075000

The table shows the product's standard dimensions. Weight column is per piece.

Other Particulair microsites

We build specialised microsites for critical industries. Each site provides in-depth product data, documentation and expert guidance for the domain it covers.

particulair.eu/ex-vac	ATEX and ACD vacuum cleaners for explosion hazard zones
particulair.eu/vace	Nozzles and accessories for critical environments
particulair.eu/life-science	Vacuums for pharma and cleanroom
particulair.eu/hardo	Explosion-protected electrical Ex-equipment

Contact and advisory

Particulair

Højtoften 12
2690 Karlslunde, Denmark
CVR: 34129894

Phone: (+45) 70 23 12 03
E-mail: sales@particulair.com
Web: particulair.eu

Product page: particulair.eu/flexcore/en/accessories/mejerikobling-pressehylster/

SMARTER THINKING • BETTER WORKING

This datasheet is generated automatically from Particulair product data. All specifications are taken from the manufacturer's factsheet and are subject to change without notice. Prices and availability provided on request.