


ABRASION-RESISTANT

NORFLEX® PVC 400 SPECIAL WALL

Highly flexible PVC hose with extra wall thickness — for compressed air and coolant

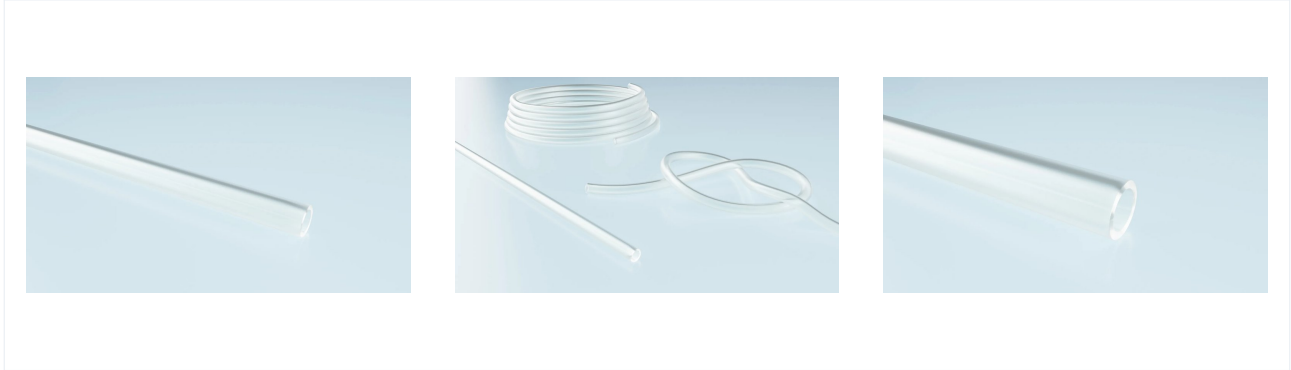

Highly flexible PVC hose with increased wall thickness ("special wall") for better pressure and crush resistance. Chemical-resistant and crush-resistant. Designed for compressed air supply, coolant transport and as connection hose in machinery and equipment. The extra wall thickness significantly extends the hose's lifetime under continuous pressure.

Media: Liquid, Gas

Temp: -15 °C to 60 °C

✓ Cut to length

APPLICATIONS

- Compressed air supply
- Coolant transport
- Connection hose in machinery
- General pneumatics
- Light chemical media

Technical specifications

Material	PVC, extra wall thickness
Colour	Transparent or lightly tinted
Wall construction	Special wall (extra thickness), smooth interior + exterior
Conveying media	Liquid, Gas
Temperature range	-15 °C – 60 °C
Short-term peak	60 °C
Cut to length	Yes
Manufacturer SKU	4002187

Standards and compliance

REACH, RoHS

Dimensions and ordering

The hose is supplied in 1 standard sizes from inner Ø 40.0 mm to 40.0 mm. Each size has its own article number. Standard roll length is typically 10 m, and the hose can be cut to length.

Inner Ø [mm]	Outer Ø [mm]	Wall th. [mm]	Weight [kg/m]	Article no.
40	50	5	0.92	40094002187

Fields without a value (—) are not specified in the manufacturer's factsheet. Overpressure and underpressure values are recommended operating limits; the product can be subjected to higher loads on request. Bend radius is measured along the inside of the hose bend.

Other Particulair microsities

We build specialised microsities for critical industries. Each site provides in-depth product data, documentation and expert guidance for the domain it covers.

particulair.eu/ex-vac	ATEX and ACD vacuum cleaners for explosion hazard zones
particulair.eu/vace	Nozzles and accessories for critical environments
particulair.eu/life-science	Vacuums for pharma and cleanroom
particulair.eu/hardo	Explosion-protected electrical Ex-equipment

Contact and advisory

Particulair

Højtoften 12
2690 Karlslunde, Denmark
CVR: 34129894

Phone: (+45) 70 23 12 03
E-mail: sales@particulair.com
Web: particulair.eu

Product page: particulair.eu/flexcore/en/abrasive/norflex-pvc-400-special-wall/

SMARTER THINKING • BETTER WORKING

This datasheet is generated automatically from Particulair product data. All specifications are taken from the manufacturer's factsheet and are subject to change without notice. Prices and availability provided on request.