


ABRASION-RESISTANT

NORPLAST® PUR 387 ANTIABRASIVO®/AS

Antistatic PUR suction hose — extremely abrasion-resistant, for gravel, mud, cement and grain

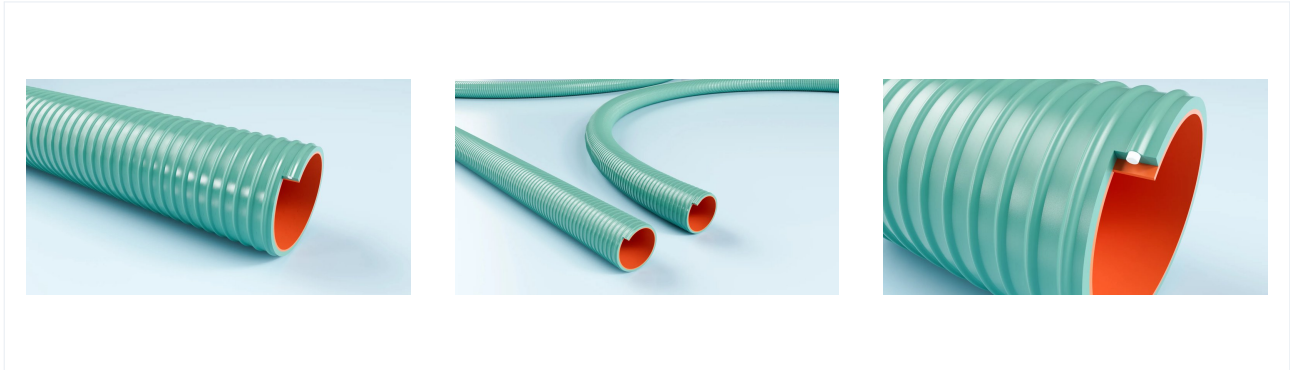

Abrasion-resistant suction and pressure hose with PU inner lining and antistatic cover (resistance $<10^9 \Omega$ per ISO 8031). Designed for transport of heavy, abrasive media — gravel, mud, cement, grain, sand and similar. Internal abrasion value is from 30 mm^3 , which is one of the best in the category. Service from -15 °C to $+60 \text{ °C}$. EN ISO 1307:2008 standard.

R: $<10^9 \Omega$

Media: Dust, Gas

Temp: -15 °C to 60 °C

✓ Cut to length

APPLICATIONS

- Gravel and sand transport
- Cement and concrete mix handling
- Mud and slurry unloading
- Grain transport (heavy granulates)
- Roof gravelling
- General abrasion-resistant material transport

Technical specifications

Material	PU inner lining, PVC outer cover (antistatic)
Colour	Black or dark grey antistatic outer cover
Wall construction	Smooth interior PU, slightly corrugated exterior, PVC spiral
Spiral material	rigid PVC
Conveying media	Dust, Gas
Temperature range	-15 °C – 60 °C
Short-term peak	60 °C
Electrical resistance	$<10^9 \Omega$
Cut to length	Yes
Manufacturer SKU	4660

Standards and compliance

en-iso-1307, iso-8031, RoHS

Dimensions and ordering

The hose is supplied in 4 standard sizes from inner Ø 76.0 mm to 152.0 mm. Each size has its own article number. Standard roll length is typically 10 m, and the hose can be cut to length.

Inner Ø [mm]	Outer Ø [mm]	Wall th. [mm]	Press. DIN [bar]	Vacuum axial [bar]	Bend rad. [mm]	Max len. [m]	Weight [kg/m]	Roll [m]	Article no.
76	92	8	6.5	0.8	456	50	2.3	50	4660075000
102	120	9	4	0.8	612	30	3.28	30	4660100000
127	147	10	3.5	0.8	762	30	4.5	30	4660125000
152	173	10.5	3	0.8	912	20	6.1	20	4660150000

Fields without a value (—) are not specified in the manufacturer's factsheet. Overpressure and underpressure values are recommended operating limits; the product can be subjected to higher loads on request. Bend radius is measured along the inside of the hose bend.

Other Particulair microsities

We build specialised microsities for critical industries. Each site provides in-depth product data, documentation and expert guidance for the domain it covers.

particulair.eu/ex-vac	ATEX and ACD vacuum cleaners for explosion hazard zones
particulair.eu/vace	Nozzles and accessories for critical environments
particulair.eu/life-science	Vacuums for pharma and cleanroom
particulair.eu/hardo	Explosion-protected electrical Ex-equipment

Contact and advisory

Particulair

Højtoften 12
2690 Karlslunde, Denmark
CVR: 34129894

Phone: (+45) 70 23 12 03
E-mail: sales@particulair.com
Web: particulair.eu

Product page: particulair.eu/flexcore/en/abrasive/norplast-pur-387-antiabrasivo-as/

SMARTER THINKING • BETTER WORKING

This datasheet is generated automatically from Particulair product data. All specifications are taken from the manufacturer's factsheet and are subject to change without notice. Prices and availability provided on request.