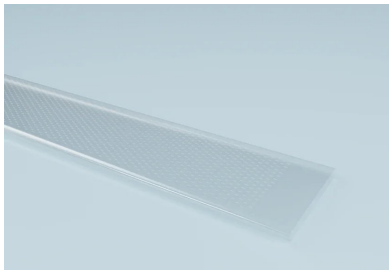
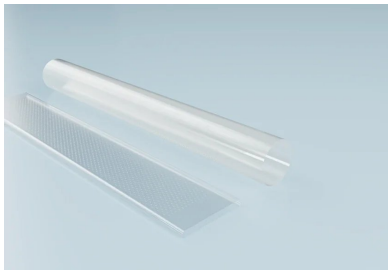
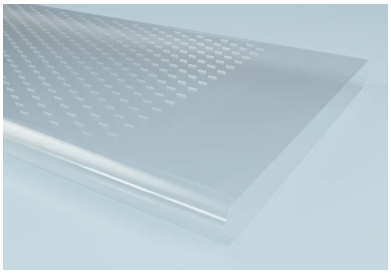
MEMBRANE TUBE DIFFUSERS

PRO■AIR Pre-PUR 622

Polyurethane (PUR) membrane tube in long lengths for membrane tube diffusers

PRO■AIR Pre-PUR 622 is polyurethane (PUR) membrane tube in long lengths from 2 to 50 m, with an inner diameter of 64.5 mm and a wall thickness of 0.7 mm. The tube is mounted on an adapter body with clamps.

Temp: -40°C to +90°C

APPLICATIONS

- Aeration of wastewater in sewage treatment plants
- Fixed-bed and bioreactors

Technical specifications

Material	Polyurethane (PUR)
Colour	Transparent
Wall construction	Membrane tube in long lengths
Temperature range	-40°C – +90°C
Cut to length	No
Manufacturer SKU	6222702

Standards and compliance

RoHS

Dimensions and ordering

The hose is supplied in 8 standard sizes from inner Ø 64.5 mm to 64.5 mm. Each size has its own article number.

Inner Ø [mm]	Total length [mm]	Weight [kg/m]	Article no.
64.5	2000	0.33	62200202702
64.5	5000	0.83	62200502702
64.5	10000	1.66	62201002702
64.5	20000	3.33	62202002702
64.5	25000	4.16	62202502702
64.5	30000	4.99	62203002702
64.5	40000	6.66	62204002702
64.5	50000	8.32	62205002702

The table shows the product's standard dimensions. Weight column is per piece.

Other Particulair microsites

We build specialised microsites for critical industries. Each site provides in-depth product data, documentation and expert guidance for the domain it covers.

particulair.eu/ex-vac	ATEX and ACD vacuum cleaners for explosion hazard zones
particulair.eu/vace	Nozzles and accessories for critical environments
particulair.eu/life-science	Vacuums for pharma and cleanroom
particulair.eu/hardo	Explosion-protected electrical Ex-equipment

Contact and advisory

Particulair
Højtoften 12
2690 Karlslunde, Denmark
CVR: 34129894

Phone: (+45) 70 23 12 03
E-mail: sales@particulair.com
Web: particulair.eu

Product page: particulair.eu/flexcore/en/membrane-tube-diffusers/pro2air-pre-pur-622/

SMARTER THINKING • BETTER WORKING

This datasheet is generated automatically from Particulair product data. All specifications are taken from the manufacturer's factsheet and are subject to change without notice. Prices and availability provided on request.