


ACCESSORIES

Dairy coupling welding part VMS

Welding part with male thread to DIN 11851 for pipes, stainless steel with NBR gasket

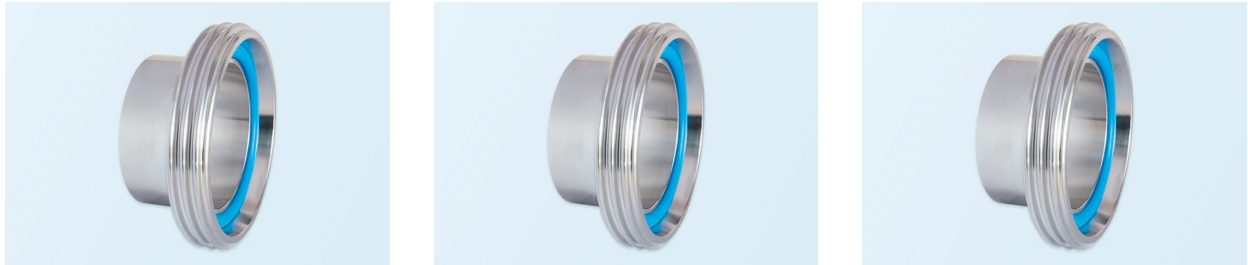

Welding part type VMS for dairy couplings to DIN 11851. The part has a male round thread (DIN 405-1) and is welded to the pipe, after which a union nut, such as on an MMS part, can be screwed on. The welding part is made of stainless steel 1.4301 with a blue NBR gasket and is available for pipes with outer Ø 29 to 104 mm.

Technical specifications

Material	Stainless steel 1.4301; NBR gasket
Colour	Gasket blue
Wall construction	Welding part with male round thread
Cut to length	No
Manufacturer SKU	5546

Standards and compliance

din-11851

Dimensions and ordering

The product is supplied in 7 standard sizes. Each size has its own article number.

Inner Ø [mm]	Outer Ø [mm]	Thread	Weight [kg/pc.]	Article no.
26	29	Rd 52 x 1/6"	0.134	5546025000
32	35	Rd 58 x 1/6"	0.137	5546032000
38	41	Rd 65 x 1/6"	0.17	5546038000
50	53	Rd 78 x 1/6"	0.25	5546050000
66	70	Rd 95 x 1/6"	0.358	5546063000
81	85	Rd 110 x 1/4"	0.521	5546075000
100	104	Rd 130 x 1/4"	0.698	5546100000

The table shows the product's standard dimensions. Weight column is per piece.

Other Particulair microsites

We build specialised microsites for critical industries. Each site provides in-depth product data, documentation and expert guidance for the domain it covers.

particulair.eu/ex-vac	ATEX and ACD vacuum cleaners for explosion hazard zones
particulair.eu/vace	Nozzles and accessories for critical environments
particulair.eu/life-science	Vacuums for pharma and cleanroom
particulair.eu/hardo	Explosion-protected electrical Ex-equipment

Contact and advisory

Particulair

Højtoften 12
2690 Karlslunde, Denmark
CVR: 34129894

Phone: (+45) 70 23 12 03
E-mail: sales@particulair.com
Web: particulair.eu

Product page: particulair.eu/flexcore/en/accessories/mejerikobling-svejsedel-vms/

SMARTER THINKING • BETTER WORKING

This datasheet is generated automatically from Particulair product data. All specifications are taken from the manufacturer's factsheet and are subject to change without notice. Prices and availability provided on request.